HEAVY DUTY VACUUM CLEANERS



Powerful, strong and productive. SL and DL were born to handle any challenge.

Resistant to stress and abrasion, made with a 5 mm thick metal.

Low maintenance, extraordinary results.



High container capacity up to 1140 liters for any debris

Versatility
SL and DL can be
connected to a pipeline

Easy and safe discharge system automatic suction stop when maximum level reached, butterly valve D400 mm


100% efficiency
filter inspection door +
automatic reverse jet pulse
filter cleaning

Good transportability
by crane or forklifts thanks
to its special intakes



DL/22/65

Connected to a 1000 lt capacity container. Power and mobility!

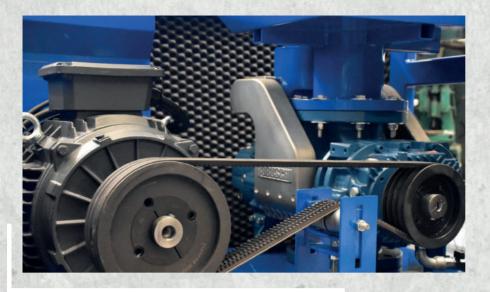



Lobe pump and motor from 22 kW up to 37 kW

Easy discharge with butterfly valve

SL and DL are suitable for hard working environments as foundries and cement plants. Powders, metal debris, granules ... Large quantities of materials (even big size) will be vacuumed efficiently





Technical data / Dati tecnici			
		SL / DL 22	SL / DL 37
Voltage / Tensione	Volt	400	400
Power / Potenza	kW	22	37
Water lift max. / Depressione max.	mm.H ₂ O	5000	8500
Air flow max. / Portata d'aria max.	M³/h	1600	1600
Filter surface / Superficie filtrante	Cm ²	160.000	160.000
Filter type / Tipo di filtro	Double Bags / Maniche doppie		
Filter efficiency / Efficienza filtro	CAT (BIA)	M PTFE	M PTFE
Safety filter / Filtro di sicurezza	Cm ²	70.000	70.000
Tank capacity / Capacità contenitore	Lt.	1150 / 1000	1150 / 1000
Pulizia automatica del filtro / filter autocleaning system		Yes/SI	Yes/SI
Compressore a bordo / compresso integrated		Yes/SI	Yes/SI
Controllo di livello / level control		Yes/SI	Yes/SI
Controllo di temperatura / temperature control		Yes/SI	Yes/SI
Suction inlet / Ø bocchettone	mm.	120 cm.	120
Dimensions / Dimensioni	160x	160x368 / 170x160x291	160x160x368 / 170x160x29

More info on: www.dupuyvacuums.com

> Contact us at: +39 0331682812





